





	1		2		3		4		5		6	
	No.	Specification	Material	Treat	Unit	Q'ty	No.	Specification	Material	Treat	Unit	Q'ty
A	1	M12 大体积公头阻尼连接螺钉	锌合金	镀镍	pc	1	9	屏蔽环	黄铜	镀镍	pc	1
	2	M12 短体公胶芯	尼龙	/	pc	1	10	防水O型圈	硅胶	/	pc	1
	3	M12 X型组装式带点波形垫片	锰钢	镀镍	pc	1	11	锁线尾爪	尼龙	/	pc	1
	4	M12 金属组装式连接套	黄铜	镀镍	pc	1	12	防水硅胶塞	硅胶	/	pc	1
	5	M12 X型组装式主体防水硅胶垫片	硅胶	/	pc	1	13	紧锁螺帽	锌合金	镀镍	pc	1
	6	M12 金属组装式主体连接螺帽	黄铜	镀镍	pc	1	14					
	7	M12 焊线式公针	黄铜	镀金	pc	2~17	15					
	8	M12 X型组装式弯式主体	锌合金	镀镍	pc	1	16					

芯位排布

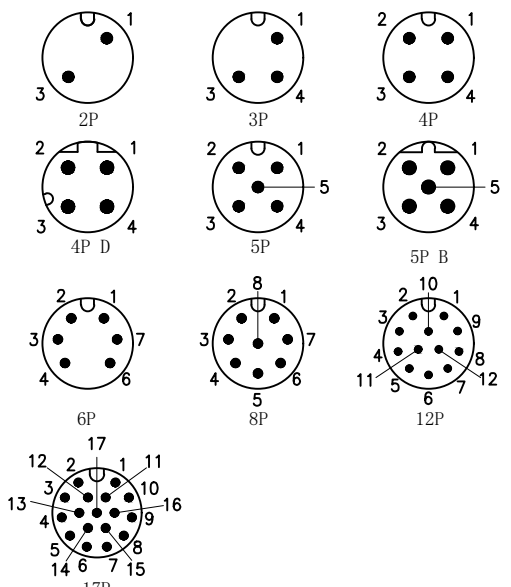



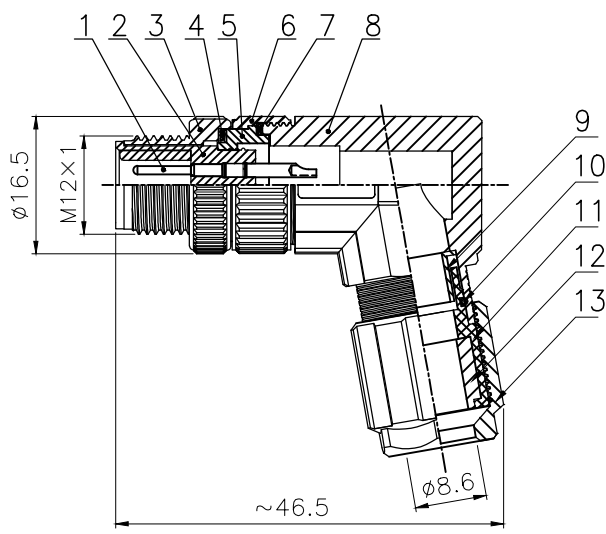

	2		3	4	4D	5	5B	6	8	12	17	GENERAL TOLERANCE (UNLESS SPECIFIED)		DWN	DATE	TITLE M12 弯式针型组装式金属插头	
	芯数	2	3	4	4D	5	5B	6	8	12	17	≤10	±0.1	W.M	2022.8.22		
D	额定电压	250V	250V	250V	250V	60V	60V	30V	30V	30V	30V	<10~≤20	±0.2	CHK	DATE		
	额定电流	4A	4A	4A	4A	4A	4A	2A	2A	1.5A	1.5A	<20~≤50	±0.5	APVD	DATE		
	额定脉冲电压	2500V	2500V	2500V	2500V	1500V	1500V	800V	800V	800V	800V	Angle	±1°				
	绝缘电阻(MΩ)	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100			UNIT	REV		
	接触电阻(mΩ)	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	MM	A	SIZE	A4		
																SHEET	DRAWING NO
														1 OF 1		M12XXXMBAFWSC608002	