
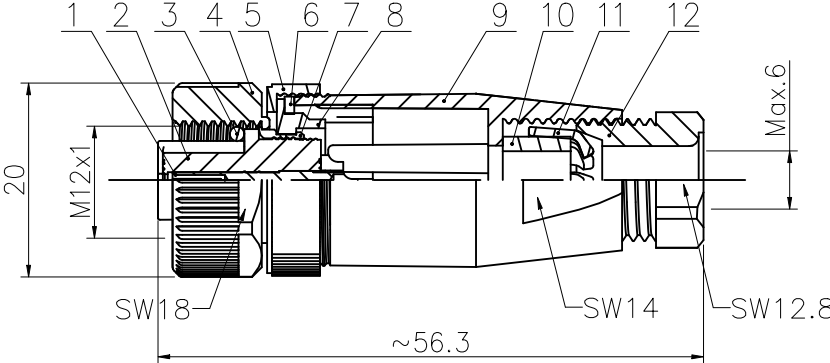









1		2		3		4		5		6																																																								
No.	Specification			Unit	Q'ty	No.	Specification			Unit	Q'ty																																																							
1	Welded wire type female needle straight needle			pc	2~17	7	M12 female welded wire assembly trunk sleeve S-291			pc	1																																																							
2	M12 coded perforated rubber core with chamfer			pc	1	8	M12 female head welding wire assembly trunk set S-290			pc	1																																																							
3	Nitrile rubber φ9*φ6*1.5 black			pc	1	9	M12 threaded assembly PG7 specification plastic housing			pc	1																																																							
4	M12 threaded female assembly with hexagonal S-253			pc	1	10	PG7M12 plastic assembly waterproof rubber plug			pc	1																																																							
5	M12 threaded body with plastic housing			pc	1	11	M12 plastic packaged tail claw PG7 specification white			pc	1																																																							
6	Waterproof gasket silicone rubber φ17.2 x φ13.6-1 Black			pc	1	12	M12 threaded tail lock nut PG7 specification plastic housing			pc	1																																																							
Core layout																																																																		
 2P  3P  4P  4P D  5P  5P B  6P  8P  12P  17P  																																																																		
Technical parameters																																																																		
Connection type: screw joint																																																																		
Mode of connection: Wire solder																																																																		
Class of pollution: 3																																																																		
Temperature range: -40℃ ~ +80℃																																																																		
Level of protection: IP67																																																																		
Insertion and removal cycle: ≥500																																																																		
A: Cup height																																																																		
 2~5P  6~8P  12P  17P																																																																		
<table><tr><td colspan="2">GENERAL TOLERANCE (UNLESS SPECIFIED)</td><td colspan="2">DWN</td><td colspan="2">C.Z.H 2024.7.29</td><td colspan="2"></td></tr><tr><td colspan="2">≤10 ±0.1</td><td colspan="2">CHK</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2"><10~≤20 ±0.2</td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2"><20~≤50 ±0.5</td><td colspan="2">APVD</td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2">Angle ±1°</td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2" rowspan="2"> THIRD ANGLE</td><td>UNIT</td><td>MM</td><td>REV</td><td>A</td><td>PART NO</td><td></td></tr><tr><td>SIZE</td><td>A4</td><td>SHEET</td><td>1 OF 1</td><td>DRAWING NO</td><td>M12XXXFPSFWSC406002</td></tr></table>												GENERAL TOLERANCE (UNLESS SPECIFIED)		DWN		C.Z.H 2024.7.29				≤10 ±0.1		CHK						<10~≤20 ±0.2								<20~≤50 ±0.5		APVD						Angle ±1°								 THIRD ANGLE		UNIT	MM	REV	A	PART NO		SIZE	A4	SHEET	1 OF 1	DRAWING NO	M12XXXFPSFWSC406002	
GENERAL TOLERANCE (UNLESS SPECIFIED)		DWN		C.Z.H 2024.7.29																																																														
≤10 ±0.1		CHK																																																																
<10~≤20 ±0.2																																																																		
<20~≤50 ±0.5		APVD																																																																
Angle ±1°																																																																		
 THIRD ANGLE		UNIT	MM	REV	A	PART NO																																																												
		SIZE	A4	SHEET	1 OF 1	DRAWING NO	M12XXXFPSFWSC406002																																																											
<table><tr><td>Number of cores</td><td>2</td><td>3</td><td>4</td><td>4D</td><td>5</td><td>5B</td><td>6</td><td>8</td><td>12</td><td>17</td></tr><tr><td>Rated current voltage</td><td>4A/250V</td><td>4A/250V</td><td>4A/250V</td><td>4A/250V</td><td>4A/60V</td><td>4A/60V</td><td>2A/30V</td><td>2A/30V</td><td>1.5A/30V</td><td>1.5A/30V</td></tr><tr><td>Rated pulse voltage</td><td>2500V</td><td>2500V</td><td>2500V</td><td>2500V</td><td>1500V</td><td>1500V</td><td>800V</td><td>800V</td><td>800V</td><td>800V</td></tr><tr><td>Insulation resistance(MΩ)</td><td>≥100</td><td>≥100</td><td>≥100</td><td>≥100</td><td>≥100</td><td>≥100</td><td>≥100</td><td>≥100</td><td>≥100</td><td>≥100</td></tr><tr><td>Contact resistance(mΩ)</td><td>≤5</td><td>≤5</td><td>≤5</td><td>≤5</td><td>≤5</td><td>≤5</td><td>≤5</td><td>≤5</td><td>≤5</td><td>≤5</td></tr></table>												Number of cores	2	3	4	4D	5	5B	6	8	12	17	Rated current voltage	4A/250V	4A/250V	4A/250V	4A/250V	4A/60V	4A/60V	2A/30V	2A/30V	1.5A/30V	1.5A/30V	Rated pulse voltage	2500V	2500V	2500V	2500V	1500V	1500V	800V	800V	800V	800V	Insulation resistance(MΩ)	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	Contact resistance(mΩ)	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5
Number of cores	2	3	4	4D	5	5B	6	8	12	17																																																								
Rated current voltage	4A/250V	4A/250V	4A/250V	4A/250V	4A/60V	4A/60V	2A/30V	2A/30V	1.5A/30V	1.5A/30V																																																								
Rated pulse voltage	2500V	2500V	2500V	2500V	1500V	1500V	800V	800V	800V	800V																																																								
Insulation resistance(MΩ)	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100	≥100																																																								
Contact resistance(mΩ)	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5	≤5																																																								
M12 Straight pass plastic assembly plug welded cable PG7 outlet hole (screw-crimped housing)																																																																		