


Category: 插拔式端子-插座/Plug-in terminal-plug

Product name: MC-PAL5.0H03-0002

Product Description: 5.0mm , 320V , 12A CE

Product Picture

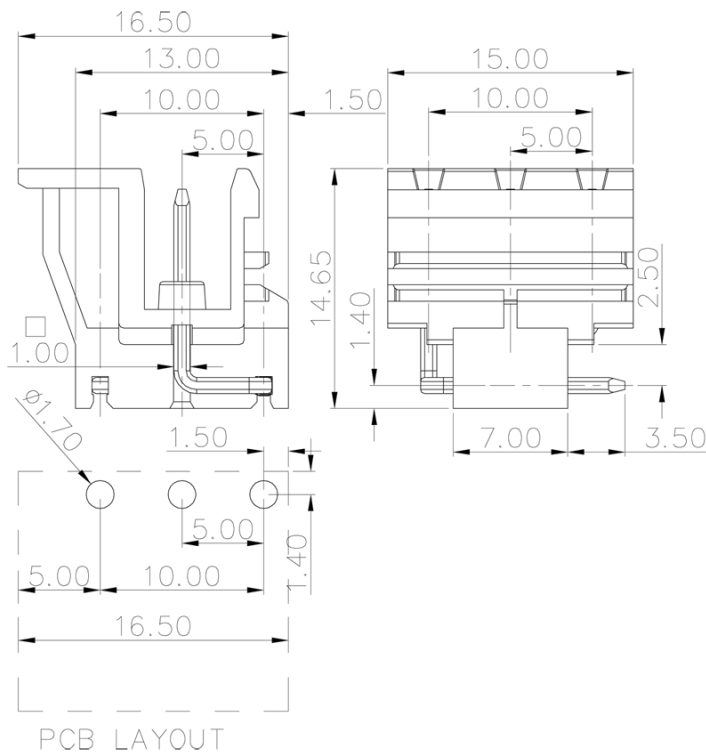

基本信息 /Basic Information

产品型号 SUPU ID	MC-PAL5.0H03-0002
产品间距 Pitch	5.0mm
产品层数 Number of levels	1
产品位数 Number of connections	3P
接线方式 Connection method	-
防护等级 Protection Level	IP20

工作温度	-40~+105℃		
Work temperature			

IEC数据 /IEC Data

额定电流 Rated Current	12A		
额定电压 Rated Voltage	320V		
过压类别 Overvoltage category	Ⅲ	Ⅲ	Ⅱ
污染等级 Pollution degree	3	2	2
额定冲击电压 Rated impulse voltage	4KV	4KV	4KV
额定电压 Rated Voltage	250V	320V	400V
硬导线截面积 Conductor cross section solid	-		
柔性导线截面积 Conductor cross section flexible	-		
柔性导线截面积，带绝缘管套 Conductor cross section flexible,with furrule	-		
锁线螺钉规格 Locking screw Specification	-		
额定扭矩 Rated Torque	-		
固定螺钉规格 Fixed Screw Specification	-		
额定扭矩 Rated Torque	-		
剥线长度 Stripping length	-		

UL数据 /UL Data

使用组别	B	C	D
Use group			
额定电流	16A	-	10A
Rated Current			
额定电压	300V	-	300V
Rated Voltage			

额定接线容量	
Rated cross section	-

材料信息 /Material Data

绝缘材料	PA66
Insulation material	
绝缘材料组别	I
Insulation material group	
阻燃等级，符合UL94	V0
Flame retardant grade, UL94 compliance	
导电体材料	Copper alloy
Contact material	
导电体表面镀层	Sn,Plated
Surface characteristics	

产品认证 /Product Certification

认证图标	
Certificate	
UL证书号	
UL file No.	
VDE证书号	
VDE No.	
TUV证书号	
TUV No.	

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi

City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code