



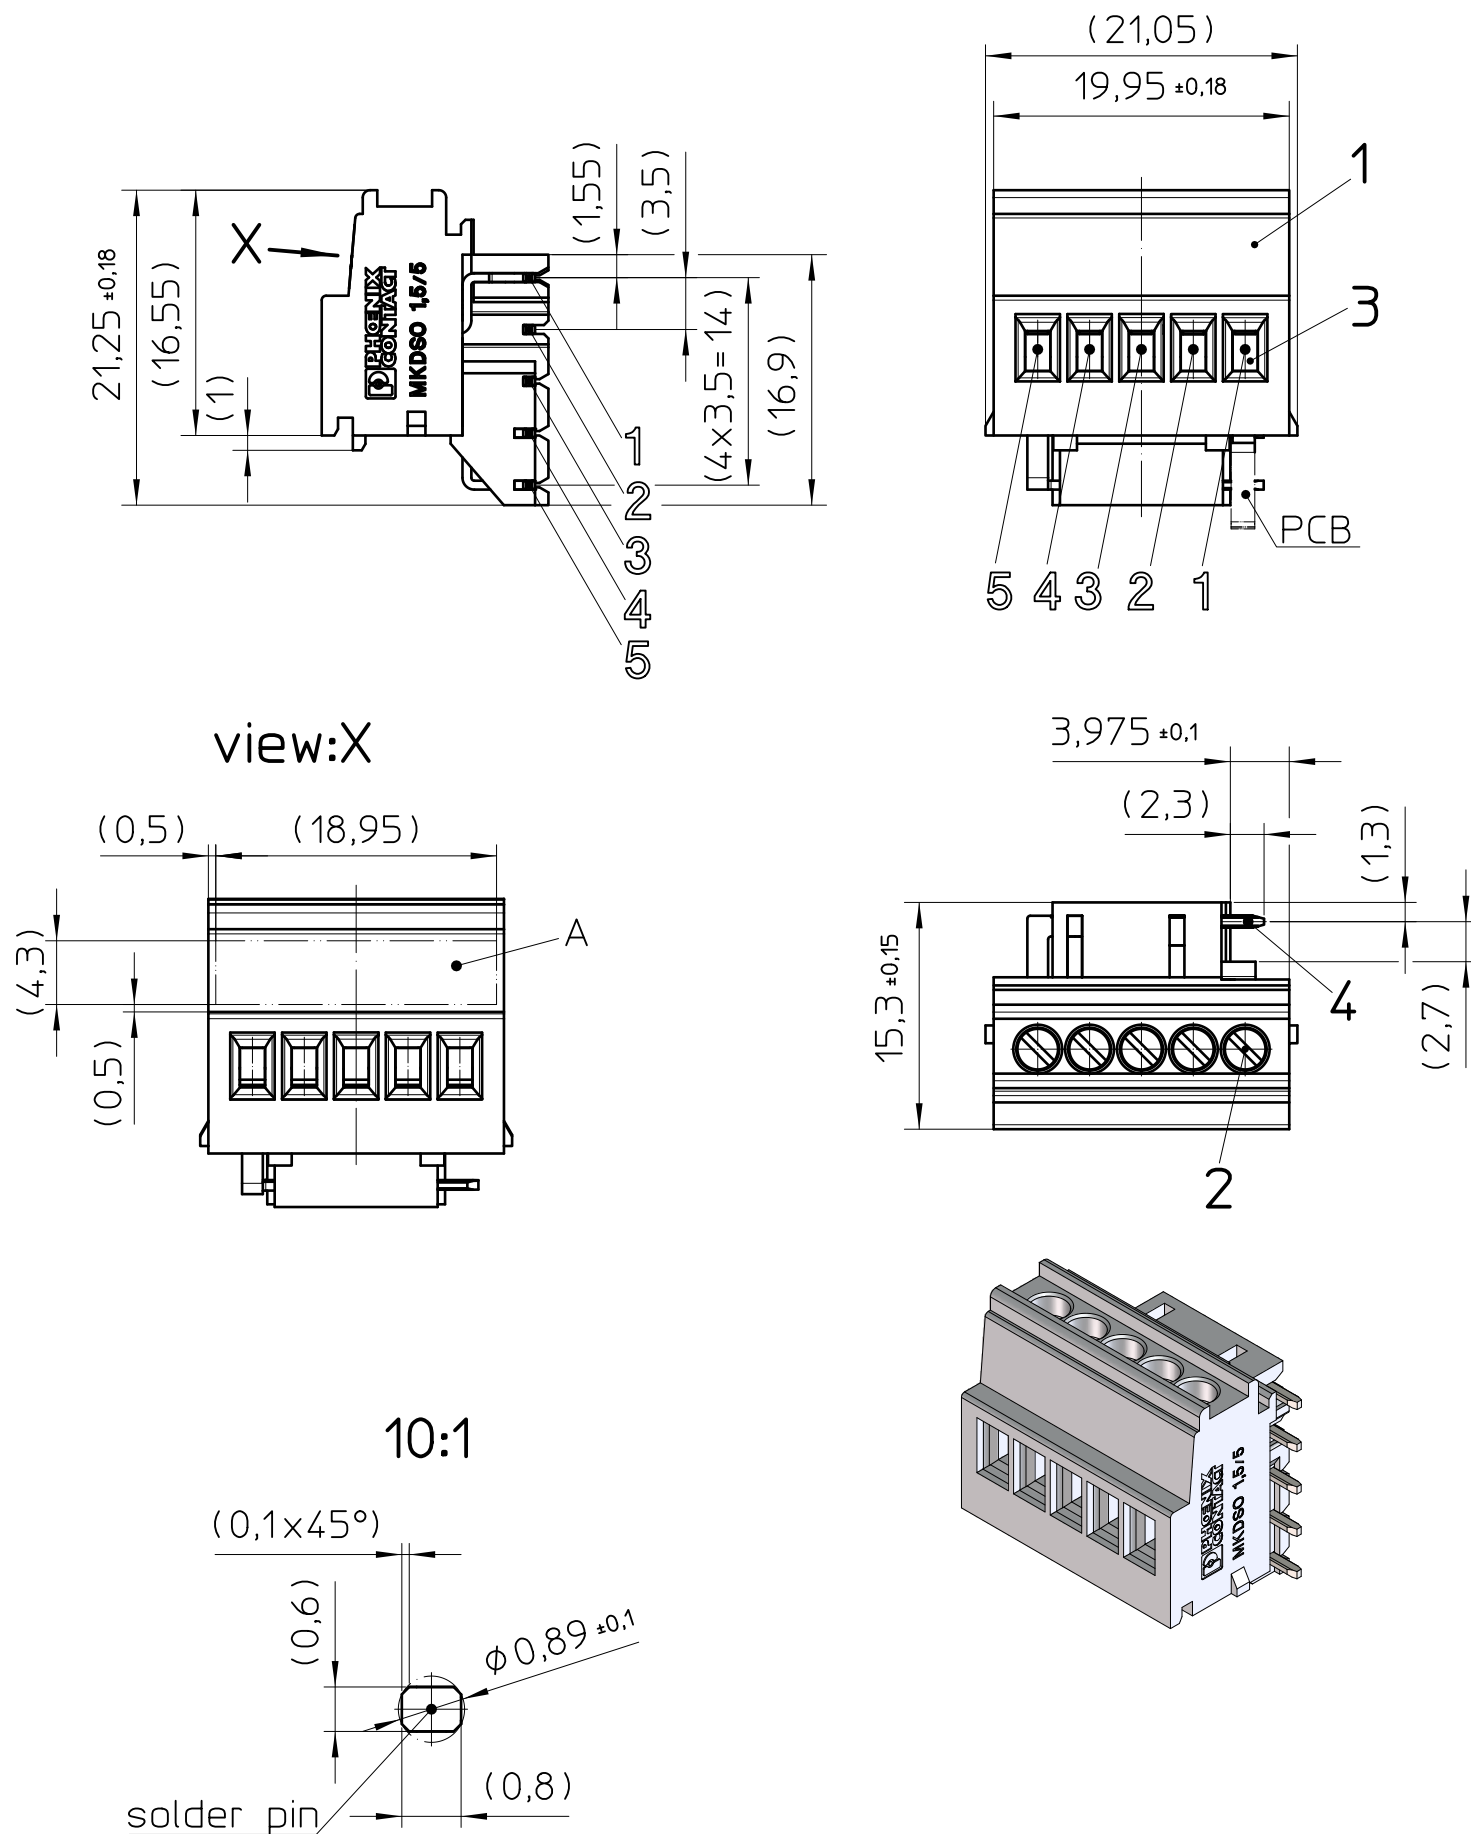

Recommended PCB

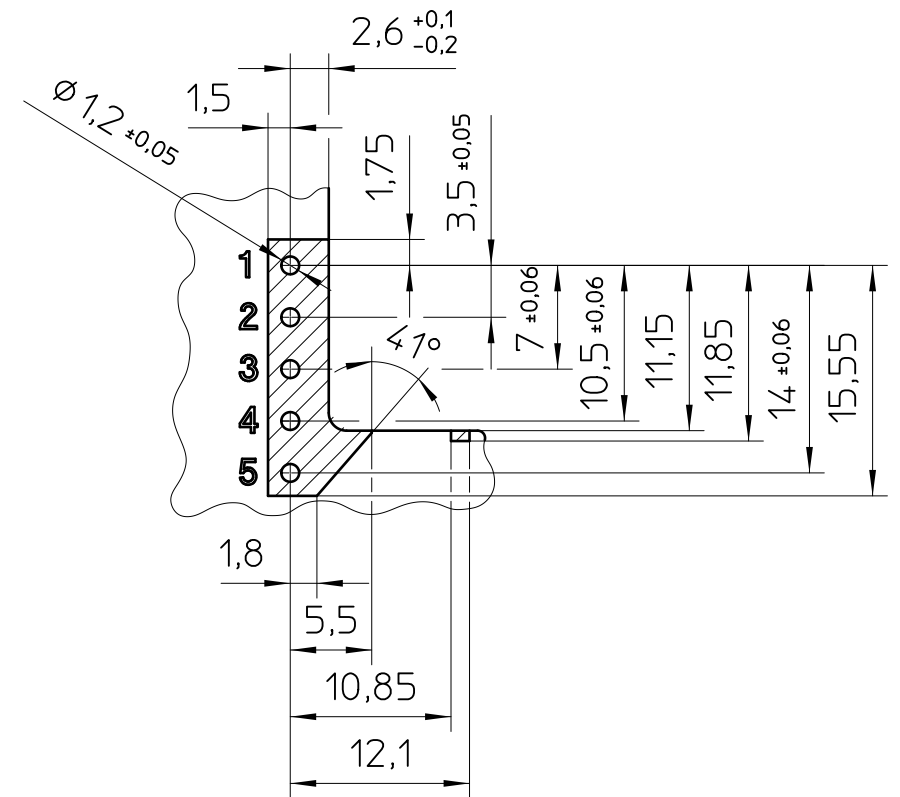

General Information:

- Simplified representation, exemplary shown in gray
- Tolerances apply in a normal climate according to DIN EN ISO 291-23/50-2, PA plastic parts with about 2% (% by weight) moisture content.
- When using this connection technology in housing systems from Phoenix Contact see the appropriate documentation.
-  Restricted area
- General tolerances PCB:
dimensions ≤ 30: ±0,1/R±0,2/±1°
dimensions > 30: ±0,15/R±0,2/±1°
symmetry: 0,2
- Web: www.phoenixcontact.com

Additional information:

- A. Marking area
- B. PCB t= 1,6±0,2

Pos.	QTY	Description	Material
1	1	HOUSING	PA
2	5	SCREW	Cu alloy
3	5	CLAMPING SLEEVE	Cu alloy
4	5	SOLDER PIN	Cu alloy

 DIN A3		document-no. / ri 00813887 / 03		article-no. 2278416	scale 2:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		date 21.12.2022	document-type TECDOC 2D_Productdrawing			
page 1 of 1		description MKDSO 1,5/ 5-R-3,5 KMGY				