


Category: 固定式端子/Plug-in terminal-plug

Product name: 2393XX

Product Description: 3.5mm , 160V , 17.5A CE



Product Picture

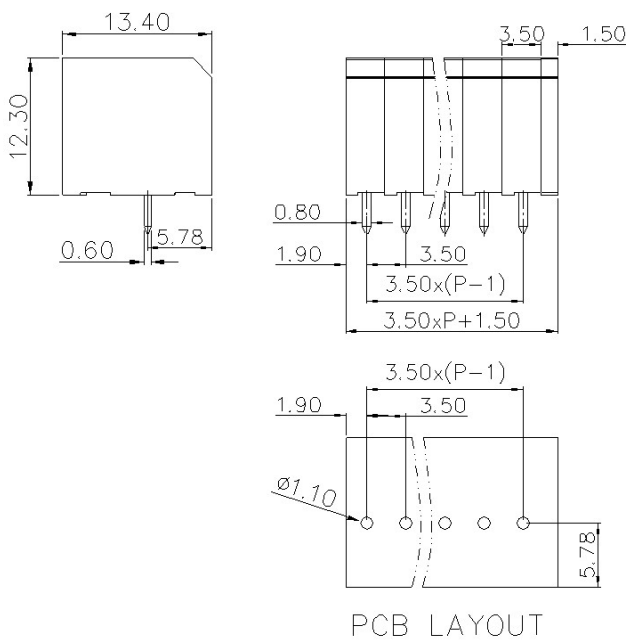

基本信息 /Basic Information

产品型号 SUPU ID	2393XX
产品间距 Pitch	3.5mm
产品层数 Number of levels	1
产品位数 Number of connections	2P-24P
接线方式 Connection method	回拉式弹簧接线Spring cage connection
防护等级 Protection Level	IP20

工作温度	-40~+105℃
Work temperature	

IEC数据 /IEC Data

额定电流	17.5A		
Rated Current			
额定电压	160V		
Rated Voltage			
过压类别	Ⅲ	Ⅲ	Ⅱ
Overvoltage category			
污染等级	3	2	2
Pollution degree			
额定冲击电压	2.5KV	2.5KV	2.5KV
Rated impulse voltage			
额定电压	160V	160V	320V
Rated Voltage			
硬导线截面积	0.2-1.5mm ²		
Conductor cross section solid			
柔性导线截面积	0.2-1.5mm ²		
Conductor cross section flexible			
柔性导线截面积，带绝缘管套	0.2-1.5mm ²		
Conductor cross section flexible,with furrule			
锁线螺钉规格	-		
Locking screw Specification			
额定扭矩	-		
Rated Torque			
固定螺钉规格	-		
Fixed Screw Specification			
额定扭矩	-		
Rated Torque			
剥线长度	5-6mm		
Stripping length			

UL数据 /UL Data

使用组别	B	C	D
Use group			
额定电流	6A	-	6A
Rated Current			
额定电压	300V	-	300V
Rated Voltage			

额定接线容量 Rated cross section	24-16AWG
-------------------------------	----------

材料信息 /Material Data

绝缘材料 Insulation material	PA66
绝缘材料组别 Insulation material group	I
阻燃等级，符合UL94 Flame retardant grade, UL94 compliance	V0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn,Plated

产品认证 /Product Certification

认证图标 Certificate	
UL证书号 UL file No.	
VDE证书号 VDE No.	
TUV证书号 TUV No.	

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code