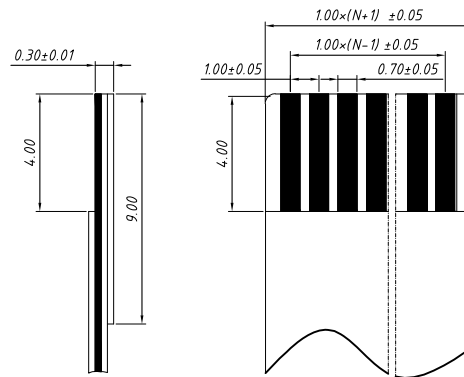
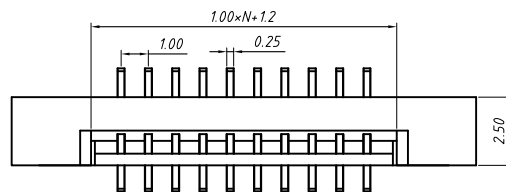


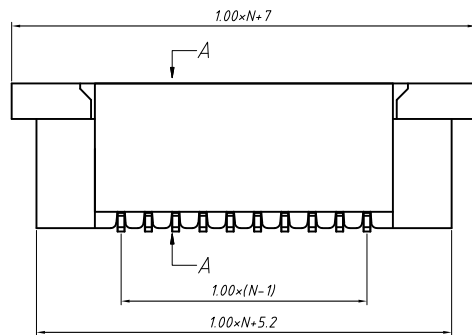


Proper Cable

Material
Housing: LCP UL94V-0
Lock: PA46, UL94V-0
Plug spring: Phosphor Bronze, Gold/Tin

Electrical
Voltage rating: 50 V
Current Rating: 0.5 A
Withstanding Voltage: 500 V
Insulation resistance: 800MΩ.Min.
Contact resistance: 20 mΩ.Max.

Mechanical
Temp. Range: -25 °C ~ +85 °C

Order Information

L-KLS1- 1240E - 5.4- XX -T-R

RoHS
Series No.
Height: 5.4mm
No. of pins (02 ~ 30 pins)
T-Vertical SMT Pin
Pack: T-Tube R-REEL

GENERAL TOLERANCE			ANGLE TOLERANCE			PROJECTION		Description:	
X. ±0.15			X. ±5°			UNITS	mm	CONN FFC 1.00mm,SMD,Vertical,with ZIF	
.X ±0.03			.X ±3°			SHEET SIZE			
.XX ±0.05			.XX ±2°					KLS P/N:	L-KLS1-1240E-5.4-XX-T-R
Draw by: Date		2018-03-10						NingBo KLS ELECTRONIC CO.,L TD.	
Check by:: Date		2018-03-10							
SCALE			SHEET		OF				



NingBo KLS ELECTRONIC CO.,L TD.