


Category: 插拔式端子-插座/Plug-in terminal-plug

Product name: MC-DPT3.5VXX-F-BK-2000

Product Description: 3.5mm , 160V , 8A CE

Product Picture

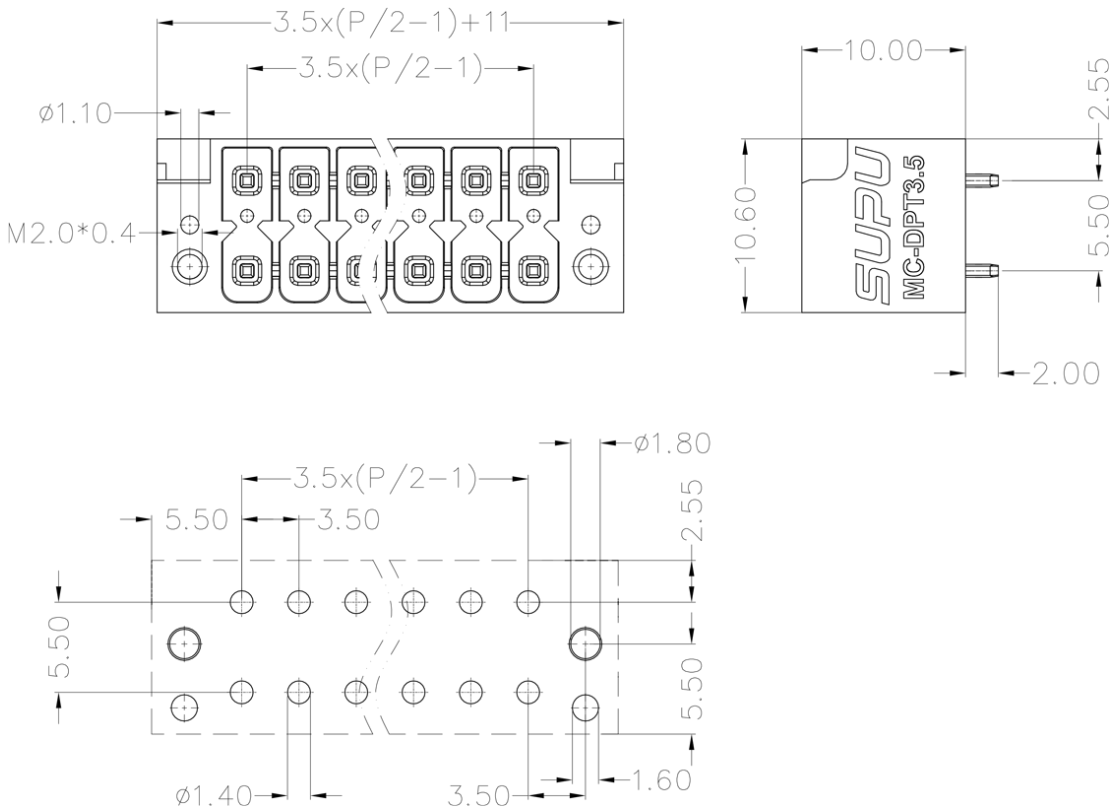

基本信息 /Basic Information

产品型号 SUPU ID	MC-DPT3.5VXX-F-BK-2000
产品间距 Pitch	3.5mm
产品层数 Number of levels	2
产品位数 Number of connections	2P-18P
接线方式 Connection method	-
防护等级 Protection Level	IP20

工作温度			
Work temperature	-40~+105℃		

IEC数据 /IEC Data

额定电流	8A		
Rated Current			
额定电压	160V		
Rated Voltage			
过压类别	III	III	II
Overvoltage category			
污染等级	3	2	2
Pollution degree			
额定冲击电压	2.5KV	2.5KV	2.5KV
Rated impulse voltage			
额定电压	160V	160V	250V
Rated Voltage			
硬导线截面积	-		
Conductor cross section solid			
柔性导线截面积	-		
Conductor cross section flexible			
柔性导线截面积，带绝缘管套			
Conductor cross section flexible,with furrule	-		
锁线螺钉规格	-		
Locking screw Specification			
额定扭矩	-		
Rated Torque			
固定螺钉规格	M2.0		
Fixed Screw Specification			
额定扭矩	0.2-0.25N.m		
Rated Torque			
剥线长度	-		
Stripping length			

UL数据 /UL Data

使用组别	B	C	D
Use group			
额定电流	8A	8A	-
Rated Current			
额定电压	150V	50V	-
Rated Voltage			

额定接线容量	
Rated cross section	-

材料信息 /Material Data

绝缘材料	LCP
Insulation material	
绝缘材料组别	IIIa
Insulation material group	
阻燃等级，符合UL94	V0
Flame retardant grade, UL94 compliance	
导电体材料	Copper alloy
Contact material	
导电体表面镀层	Sn,Plated
Surface characteristics	

产品认证 /Product Certification

认证图标
Certificate



UL证书号
UL file No.

VDE证书号
VDE No.

TUV证书号
TUV No.

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code